




“AMBASSADOR”™

4 AXLE TRAILER AND 2 AXLE JEEP

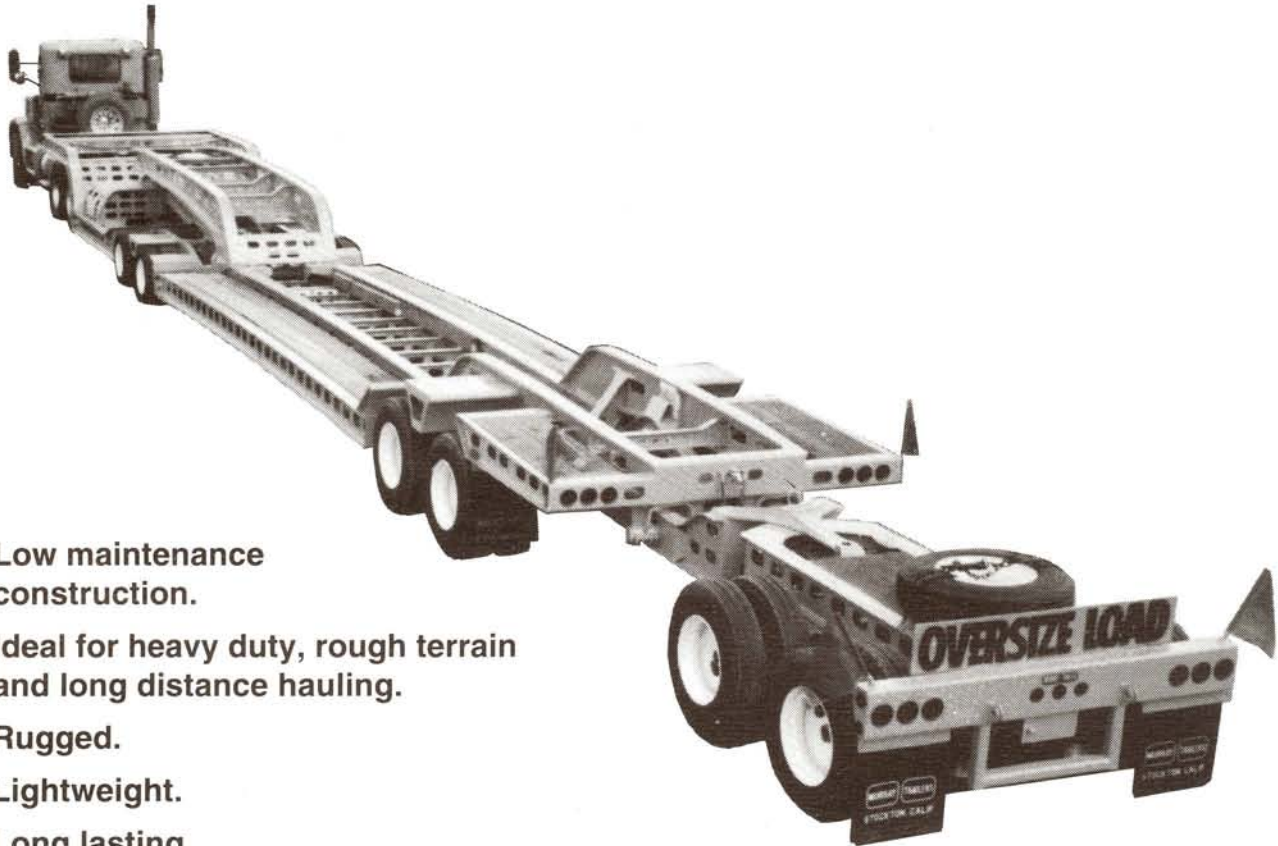

- Low maintenance construction.
- Ideal for heavy duty, rough terrain and long distance hauling.
- Rugged.
- Lightweight.
- Long lasting.

Features:

- Murray detachable gooseneck.
U.S. PATENT NO. 3326527.
- Outrigger sockets - 22 each side with twenty-four 11" outriggers furnished.
- Mechanical distribution unit (California legal.)
- Air ride axles 8 & 9.
- Backup steering lock.
- 8 heavy duty axles.
- 16½" x 7" "S" cam brakes on axles 6, 7 & 8 ,9.
- 12¼" x 7½" "S" cam brakes on the 16 tire jeep.
- Permitted loads to 76 tons.
(Up to 71 tons with 8-tire jeep.)
(California Permit.)
- Spare tire and wheel with 16 tire jeep.


“It’s the payload that counts!”

MURRAY TRAILER • 1745 E. Mariposa Road • Stockton, California 95205-7790
PHONE: (209) 466-0266 • FAX: (209) 466-0550

THE MURRAY "AMBASSADOR"™

Specifications:

- **Weights:** Main trailer with 24' deck: 29,690 lbs.
16 tire jeep with hydraulic tower: 13,660 lbs.
Combined weight as shown: 43,350 lbs.
8 tire jeep: 11,000 lbs.
- **Tires:** 275/70R 22.5 16 ply on axles 6, 7, 8, 9.
215/75R x 17.5 on axles 4 & 5 with 16 tire jeep.
275/70R 22.5 16 ply on axles 4 & 5 with optional 8 tire jeep.
- **Wheels:** 10 hole 22.5 on the main trailer, standard.
6 hole 17.5 on the 16 tire jeep.
- **Width:** 10' except 8' 6" on axles 8 & 9.
- **Height:** Raised center frame design. Outer deck height 24".*
Over front loading, 10".
*Varies somewhat with hydraulic lift 5th wheel height.
- **Options:**
 - 8 tire jeep with hydraulic lift fifth wheel.
 - 8 tire skeleton jeep (no deck).
 - Push bar.
 - Aluminum wheels.
 - Air dump valve and air ride scaling gauge on axles 8 & 9.
 - Extra heavy duty outriggers: front of deck, three on each side.
 - Other tire sizes available.

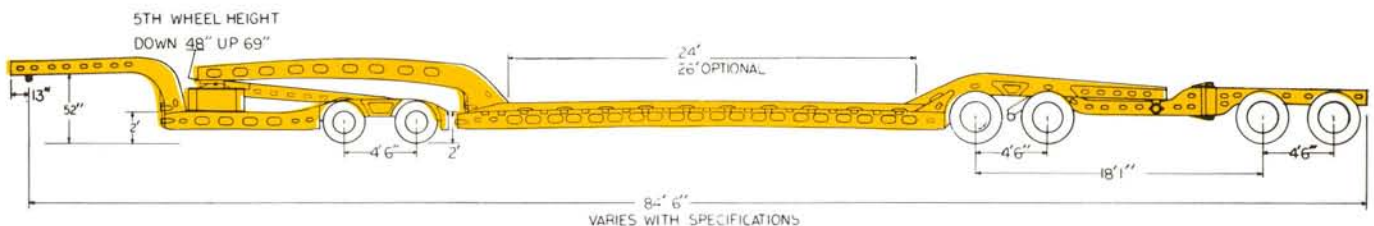

Jeep & Trailer	GVWR: 195,000 lbs.
Jeep	GAWR: 18,160 lbs. x 4 axles
Trailer	GAWR: 25,000 lbs. x 4 axles



"Built by Haulers for Haulers!"