




## **“Easy Load”™**

### **Low Profile 32 Ton 8 Tire Trailer**

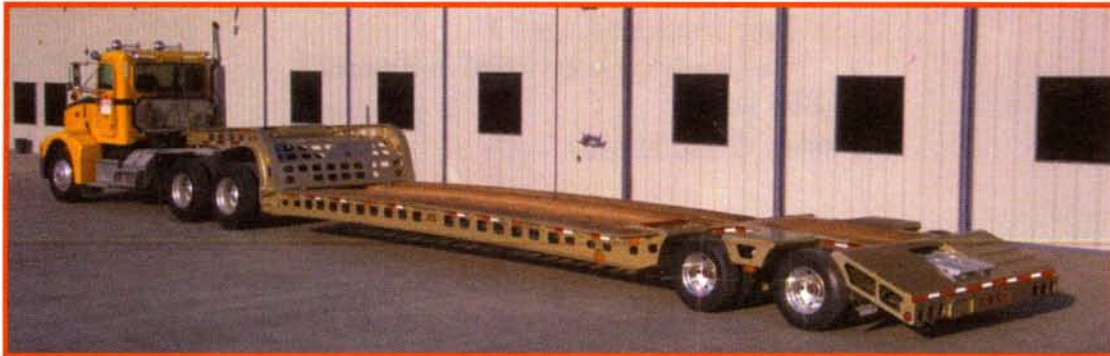

#### **Over-the-front Loading:**

- **Simple Mechanical Detachable Gooseneck:**

(Murray U.S. Pat. No. 3406980)

- **Low and stable: Load & Go without ramps for most loads**
- **Rugged, long-lasting construction: all high-tensile steel (A514 “T-1”)**

#### **Guaranteed over-the-back loading**

**Smooth Air-Ride suspension: Suspension dump valve and scaling gauge included**

#### **Accessories Included:**

- **Twelve 11” outriggers**
- **Spare tire and wheel**

**Warranty: One full year parts and workmanship**



***“It’s the payload that counts!”***



# The Murray "Easy Load"™

## Specifications:

- **Capacity:** 32 tons
- **Weight:** 10,500 lbs. (20' Deck)  
11,600 lbs. (24' Deck)
- **Tires:** 235/70R17.5
- **Width:** 8'-6"
- **Length:** 40' 10" standard
- **Deck Length:** 20' Standard  
14' to 24' available
- **Height:** Over rear wheels: 32"  
Beavertail end: 23" standard  
Deck: 24" nominal.\*  
Over front loading: 10"  
\*Varies with load weight and 5th wheel height.
- **GVWR:** 78,800 lbs.
- **GAWR:** 2 axles @ 20,000 lbs. each

## Options:

- Lockable tool boxes in gooseneck.
- Shorter deck, or longer up to 24 ft.
- Aluminum (machined or polished) or chrome wheels.
- Rear in-deck loading ramp storage with air locks. (Top Photo)
- Rear air operated lift ramps (Center Photos)
- Sliding outriggers: extend width to 12 ft. (Bottom Photo)

## Optional Accessories:

- Loading ramps for rear
- Short "wedge" ramps for front




Optional in-deck ramp storage



Optional air lift ramps



Optional sliding outriggers

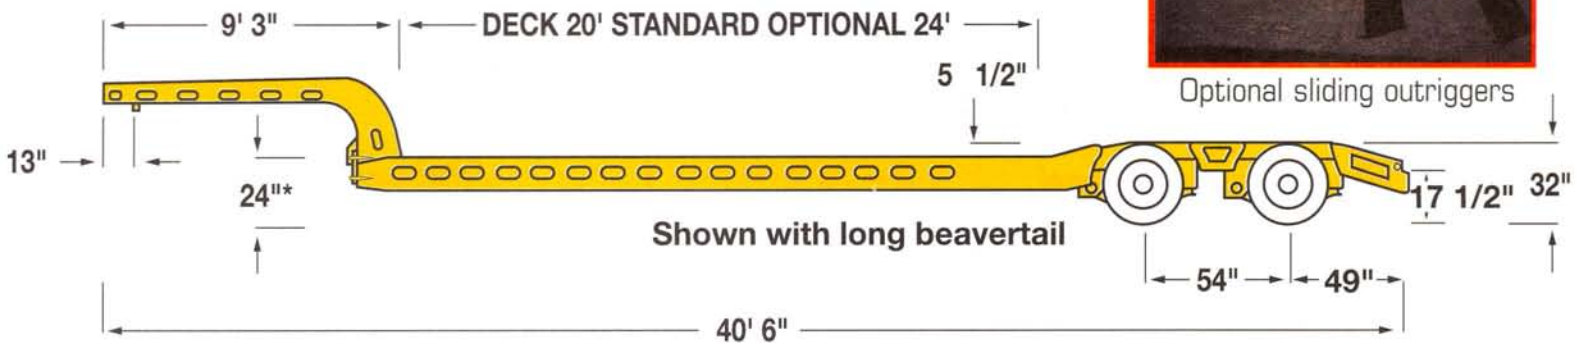

**"Built by Haulers for Haulers!"**