



# Double Drop "Easy Tail" Model Trailer Series



Ease of Loading, light weight, and low height combine to provide unsurpassed versatility to move equipment safely and efficiently.

### Using AIR to operate the tail means

- No capacity used to haul hydraulic power plant
- No oil leaks from the trailer

### Standard Equipment

- Capacity (net).....32 Tons
- GVWR / GAWR.....78,700 lbs. 2 axles @ 20,000 lbs. each
- Trailer Weight (est.).....13,500 lbs
- Axles .....2, each 25,000 lbs., Tandem Dual Tire with oil bath bearings
- Brakes .....12 - 1/4" x 7 1/2" Full Air, Spring with ABS 2S1M with automatic slack adjusters
- Wheels .....Stud piloted / Steel / outboard drums
- Tires .....245 / 70 x 17.5 Michelin 235 / 70 x 17.5 Bridgestone
- Tail Load Angle.....14 1/2 degrees (7'-8" long from hinge)
- Width: Gooseneck, Deck and Tail.....8'-6"
- Decking (Main deck).....3" Douglas Fir
- Unloaded Deck Height.....27"
- Deck Length.....For overall trailer length of 48', the maximum well length is 22'-9" with a standard (short) gooseneck (see options and dimensions)
- Trailer Length.....With 40' KP to last axle, overall length is 49' with standard gooseneck, 23'-9" deck (well), and 13 1/2" pin setting
- Tail Power.....ALL AIR (truck brake system supplied); air spring main tail lift Murray 6" air cylinder tail tip actuators
- Suspension .....Air Ride, 25,000 capacity with dump valve and scaling gauge
- Paint.....Customer - selected color DuPont IMRON 5000
- Gooseneck.....Mechanical removable and fixed versions available
- Construction .....130 KSI / 100 KSI Minimum yield steel crossmembers and main beams. Outside beam designed with wide gooseneck and 2-fold tail



### Options and Accessories

- Aluminum Wheels
- Removable wheel covers (shown)
- Outriggers, sliding or clip-on
- Front and gooseneck loading ramps
- Second kingpin setting
- "D" rings
- Gooseneck decked with 2" fir
- Longer decks; longer goosenecks

**Murray Trailer • 1754 E. Mariposa Road, Stockton, CA 95205-7790  
Phone: 209-466-0266 • Fax: 209-466-0550**



**Detachable Gooseneck Versions:**

- Simple, Quick over the front loading (10")
- Height of Deck: 27" normal

**Open Tire Versions:**

- Height over rear wheels: 32"
- Height of Deck: 27" nominal
- Decking over tires: None; removable covers available


**Covered Tire Double Drop**

- Height over rear wheels: 37"
- Height of Deck: 27" nominal
- Decking over tires: 3/16" steel, non-removable


**Covered Tire Single Drop**

- Height over rear wheels: 37"
- Height of Deck: 37" nominal
- Decking over tires: 3/16" steel, non-removable


**Model CDDD: Covered Tire, Double Drop, Detachable Gooseneck**

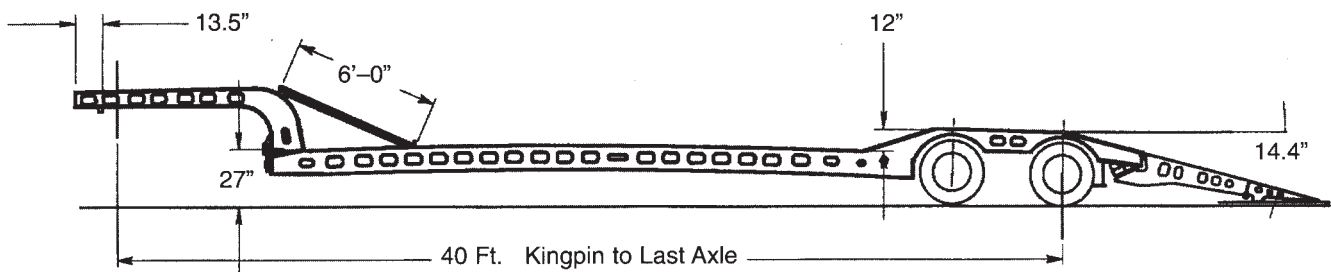


**Model ODDD: Open Tire, Double Drop, Detachable Gooseneck**

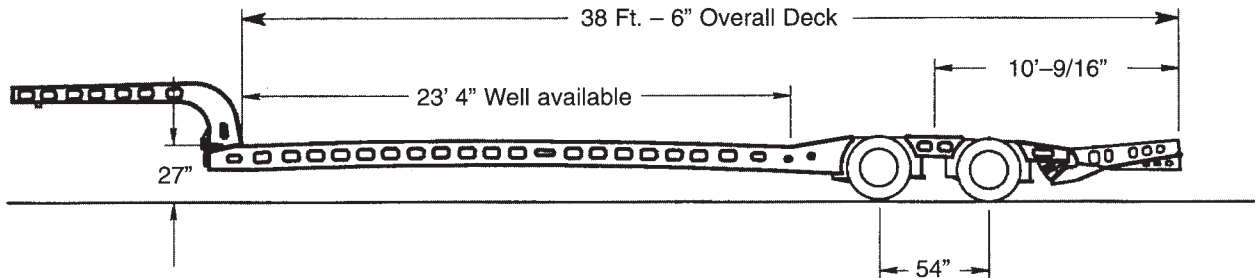

**Model ODDF: Open Tire, Double Drop, Fixed Gooseneck**

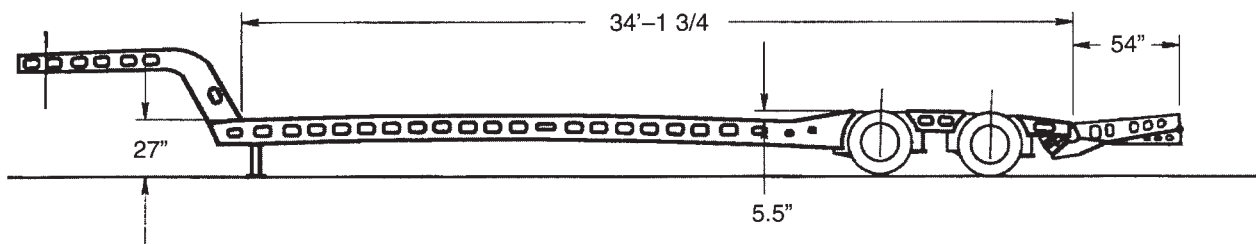

**Model CSDF: Covered Tire, Single Drop, Fixed Gooseneck**

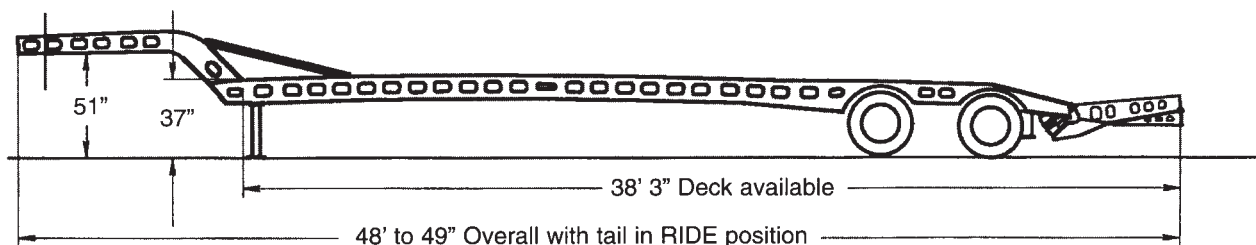

**“Built by Haulers for Haulers!”**