

Low
17.5 Wheels



Long or short
Beavertail

“INTERSTATE” Low-Profile 3-Axle Model



Features:

- Permitted NET load in all 50 states & Canada ---**46 Tons***
- Air Ride Suspension
- 235/75 x 17.5 tires, one spare included
- All High-Tensile Steel Construction
- Gooseneck full width mechanical removable for over the front loading (U.S. Patent #3326572)
- Paint, DuPont IMRON 5000 customer selected color
- Guaranteed over-the-back loading!
- Base trailer weight (approx) - 15,500* lbs. w/optional aluminum wheels
- 12 (twelve) 11” outriggers furnished
- LED Lighting throughout
- 12¼” x 7½” S-cam brakes
- GVWR; 100,000
- GAWR; 3 Axles, 22,500 lbs each
- * With 20’ deck and optional 16” longer gooseneck

**“IT’S THE PAYLOAD
THAT COUNTS!”**



LONG BEAVERTAIL WITH
RAMP STORAGE



READY TO LOAD



22 FLAT DECK = 48’ LENGTH WITH SHORT BEAVERTAIL

Rev. 12-07

MURRAY TRAILER • 1745 E. Mariposa Road • Stockton, California 95205-7790

PHONE: 209.466.0266 • FAX: 209.466.0550

www.murraytrailer.com


THE MURRAY "INTERSTATE"

STANDARD SPECIFICATIONS


- Capacity (NET) 46 Tons - w/optional 16" longer gooseneck used in all 50 states & Canada
- Trailer Weight (Est.) 15,500 lbs. with optional aluminum wheels
- GAWR / GVWR 22,500 lbs. X 4 axles / 100,000 lbs.
- Brakes 12¼" x 7½" S-cam brakes with ABS
- Wheels 6 hole steel - stud piloted
- Tires 235/75R x 17.5 tires, 30.7" high
- Decking (Main deck) 3" x 12" Hardwood each side, 2" x 12" Douglas Fir all other
- Unloaded Deck Ht. Flat deck: 27" nominal (varies with 5th wheel height)
Over-front Loading: 10" Over rear wheels: 36"
- Construction All 130 KSI Minimum yield beam flanges
- Trailer and Deck Length . . . 48' overall and up to 51' 4"
overall length, deck 20' to 23' 4" deck
- Suspension Air Ride Suspension
- Axles 3 each 22,500 lbs.
- Axle spacing 54"

OPTIONS & ACCESSORIES

- Disc brakes w/ABS all axles & 8 hole hub piloted aluminum wheels
- 60" axle spacing
- 16" longer gooseneck, second kingpin setting available
- Aluminum Wheels (Save 420 lbs)
- Locking tool boxes in gooseneck
- Front & rear loading ramps
- Rear ramp storage in the rear of trailer
- Full wheel covers • Deck length up to 23' 4"
- Chain box in deck with aluminum covers
- Long & Short Beavertail
- Two kingpin settings
- Wood decked gooseneck
- Lockable toolboxes
- Hubometer
- "D" ring
- Other options

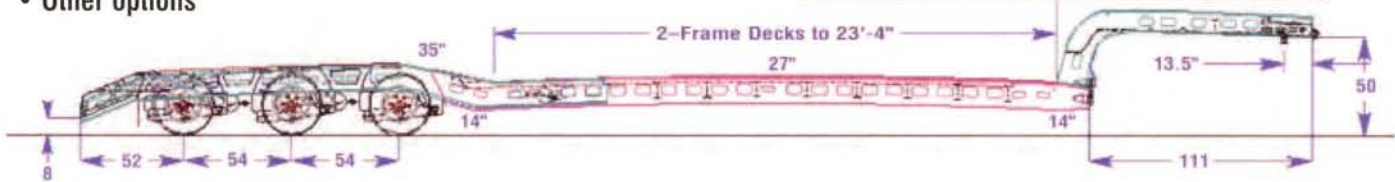

"Bridgeplates" Optional lockable toolboxes

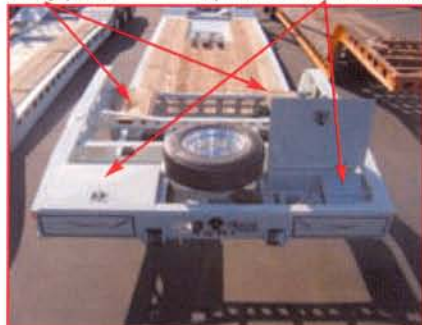

Low loading angle with ramps in place 15.25°



Rev. 12-07

"Built by Haulers for Haulers!"