

"PROFESSIONAL" 16-TIRE Heavy Equipment Trailer



Standard Features:

- O Permitted NET Load (CA, NV, AZ, NM, UT, TX) 46 Tons*
- Output Guaranteed over-the-back loading
- **Base trailer weight (approx.) 13,300 lbs. (21'6" Deck)**
- Murray EXPANDABLE running gear 8'-6" to 10' using 8 heavy duty Trunnion axles & Murray's 3-point suspension w/ UHMW wear points
- **Murray mechanical detachable gooseneck**
- **Straight or tapered front corners of gooseneck**
- **S-Cam ABS Brakes (4S2M), Automatic Slack Adjusters**
- LED lighting

*Capacity and weight estimate are based on previously completed trailers. Actual capacity may vary depending on pulling tractor and options selected.





REMEMBER, IT'S THE PAYLOAD THAT COUNTS!





Over-the-Rear Loading



Murray Trailers • 1745 E Mariposa Rd. • Stockton, CA 95205 Phone: 209-466-0266 • Online: www.murraytrailer.com



Standard Features:

- **Construction:**
- Axles:
- **GVWR**
- Suspension:
- **Expando Power:**
- Wheels:
- **Tires:**
- **Decking:**
- Paint:
- Goosenecks:
- **Unloaded Deck Height:**
- **Over-front loading:**
- **Over-rear loading:**
- **Overall Length:**

Optional Features:


- Deck Lengths to 22'-10"
- 16" Longer Goooseneck
- Second kingpin
- Air operated "RoboLink" & Deck Latch release (US PAT #8752854, 9272591)
- Steel inside islands between tires
- **Disc brakes with ABS**
- Full or half wheel covers
- 20" Longer Tail
- Lockable tool boxes in wide neck
- Front & rear loading ramps
- "D" Rinas
- **Outriggers Sliding or Removable**
- Chain boxes
- Excavator deck well or pan
- Loadmaster Style Rear End
- Spare tire with lockable mount

The Murray "Professional"

THE MOST VERSATILE 5-AXLE ON THE MARKET

130 KSI/100 KSI yield steel 4 trunnion, GAWR 18,160 lbs. each 106,000 lbs. Murray 3-point system Murray 6" air cylinders 8-hole, hub piloted aluminum 215/75R x 17.5 - Hankook or Continental 3" Apitong outside, 2" Douglas Fir inside **DuPont IMRON ELITE** Mechanical Removable wide neck 24" nominal center of deck (dependent on 5th wheel height) 10" 34"

42'-3" with standard 21'-6" deck, gooseneck, & tail

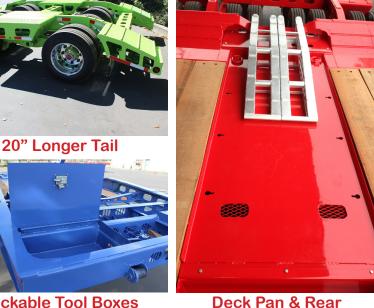

Lockable Tool Boxes

Loading Ramps

