

**Guaranteed Over  
the Back Loading**



**Air Ride  
Suspension**

## **“EASY LOAD” Low Profile 32 Ton 8-Tire Trailer**



### **Standard Features:**

- ◇ Permitted NET Load - 32 Tons\*
  - ◇ Guaranteed over-the-back loading
  - ◇ Base trailer weight (approx.) 10,500 lbs. (21'6" Deck)
  - ◇ Air-Ride Suspension w/ dump valve & scaling gauge
  - ◇ Murray Mechanical Detachable Gooseneck
  - ◇ Hankook or Continental 235/75R17.5 Tires
  - ◇ Straight or tapered front corners of gooseneck
  - ◇ S-Cam ABS Brakes (2S1M), Automatic Slack Adjusters
  - ◇ LED lighting
  - ◇ 8-Hole, Hub Piloted Aluminum Wheels - 4 Polished
- \*Capacity and weight estimate are based on previously completed trailers.  
Actual capacity may vary depending on pulling tractor and options selected.

### **Fire District Trailers**



***REMEMBER, IT'S THE PAYLOAD THAT COUNTS!***



### **Over-the-Rear Loading**

**Murray Trailers • 1745 E Mariposa Rd. • Stockton, CA 95205  
Phone: 209-466-0266 • Online: [www.murraytrailer.com](http://www.murraytrailer.com)**



# The Murray “Easy Load”

## Standard Features:

- **Construction:** 130 KSI/100 KSI yield steel
- **Axles:** 2 Axles at 20,000 lbs. each
- **Suspension:** Air-Ride Suspension w/ dump valve & scaling guage
- **Capacity:** 32 Tons
- **Wheels:** 8-hole, hub piloted aluminum
- **Tires:** 235/75R x 17.5 - Hankook or Continental
- **Decking:** 3” Apitong outside, 2” Douglas Fir inside
- **Paint:** DuPont IMRON ELITE
- **Goosenecks:** Mechanical Removable wide neck with a single kingpin
- **Deck Height:** 27” nominal center of deck (dependent on 5th wheel height)
- **Over-front loading:** 10”
- **Over-rear loading:** 34”
- **Overall Length:** 43’-4” with standard 21’-6” deck, gooseneck, & tail
- **GVWR:** 80,000 lbs.

## Optional Features:

- Deck Lengths 12’ to 24’
- 16” Longer Gooseneck
- Second kingpin
- Air operated “RoboLink” & Deck Latch release (US PAT #8752854, 9272591)
- Sliding Outriggers
- Disc brakes with ABS
- Full wheel covers
- Fire District Code 3 Lighting
- Lockable tool boxes in wide neck
- Front & rear loading ramps
- ”D” Rings
- Outriggers
- Chain boxes w/ optional lids
- Excavator deck well or pan
- Rear Diamond Ramp storage w/ air lock
- Spare tire with lockable mount
- Electric winch on gooseneck



Ramp Storage




Wheel Covers



Lockable Tool Boxes



Electric Winch w/ Spare Tire Mount

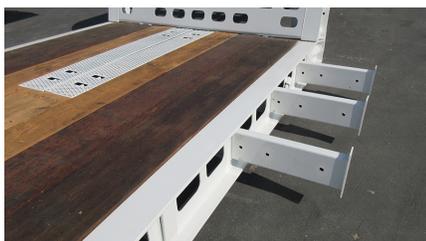

Sliding Outriggers



Outside Lines for Robolinks



Deck Pan & Chain Box