




# Murray Trailers

## Interstate Model, 12-Tire, 22'-6" Deck

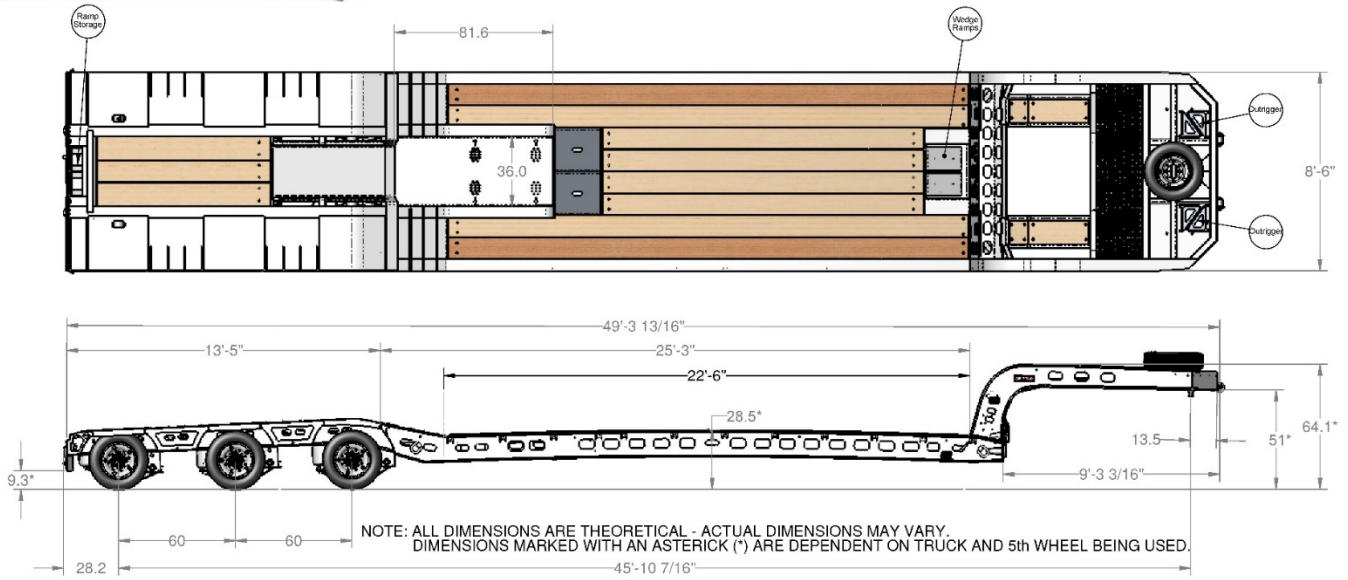

AS CONFIGURED ABOVE | WEIGHT 16,310 LBS. | GVWR 106,000 LBS. | CAPACITY 90,000 LBS

GOOSENECK	
LENGTH	STANDARD (8') OR 16" LONGER
KINGPIN SETTING	13.5" SETBACK
2 <sup>ND</sup> KP SETTING (OPTIONAL)	16" BEHIND 1 <sup>ST</sup> KINGPIN
5 <sup>TH</sup> WHEEL HEIGHT	48" TO 52"
SWING CLEARANCE	89.5" TO 103"
BEAMS – FLANGES & WEB	FLANGES 130 KSI & WEBS 100 KSI
MAIN DECK	
DECK LENGTHS	UP TO 24 FEET
DECK BEAM FLANGES	130 KSI
DECK BEAM WEBS	100 KSI
DECK CROSSMEMBERS	100 KSI
REAR CROSSMEMBERS X 2	130 KSI
OUTRIGGER BRACKETS	11 PER SIDE
D-RINGS	OPTIONAL PER SIDE
DECKING	3" APITONG OUTSIDE, 2" FIR INSIDE
UNLOADED DECK HEIGHT	28.5" – VARIES WITH 5 <sup>TH</sup> WHEEL
OPTIONAL	EXCAVATOR PAN OR WELL
REAR END	
DECK OVER AXLE HEIGHT	34"
OPTIONAL	LOADING RAMP STORAGE
ELECTRICAL	
CONNECTOR	7-WAY
LIGHTS	ALL LED
OPTIONAL	12V FLASHERS, STROBES

AXLES & RUNNING GEAR	
NUMBER OF AXLES	3
GAWR	20,000 LBS. X 3
AXLE SPACING	54" OR 60"
SUSPENSION	AIR RIDE
DRUM BRAKES	ABS (2S1M), S-CAM, AUTO SLACK
FEATURES	DUMP VALVE, SCALING GAUGE, REAR AXLE LIFT
WHEELS	ALUMINUM, 8-HOLE, HUB PILOTED
TIRES	235/75R 17.5
FINISHES	
UNDERCOAT	2 COATS IMRON ELITE EPOXY PRIMER
PAINT	3 COATS, IMRON ELITE BY DUPONT
SAFETY EQUIPMENT	2 MUD FLAPS & REFLECTIVE TAPE
OPTIONAL EQUIPMENT	
AIR OPERATED "ROBOLINK" & DECK LATCH (US PAT 8752854, 9272591)	
LOAD BEARING WHEEL COVERS	
DISC BRAKES WITH ABS	
CLERAL SCALE SYSTEM, WIRELESS (AIR)	
LOCKABLE TOOL BOXES IN WIDE GOOSENECK	
FRONT LOADING RAMPS, WEDGE AND PAVER	
OUTRIGGERS, SLIDING OR REMOVABLE	
CHAIN BOXES WITH ALUMINUM COVERS	
PAVER RAMP STORAGE ON DECK OR UNDER DECKING	
SPARE TIRE WITH LOCKABLE MOUNT ON GOOSENECK	
P.S.I. TIRE INFLATION SYSTEM	