




# Murray Trailers

## Professional Model, 16-Tire, 22'-10" Deck

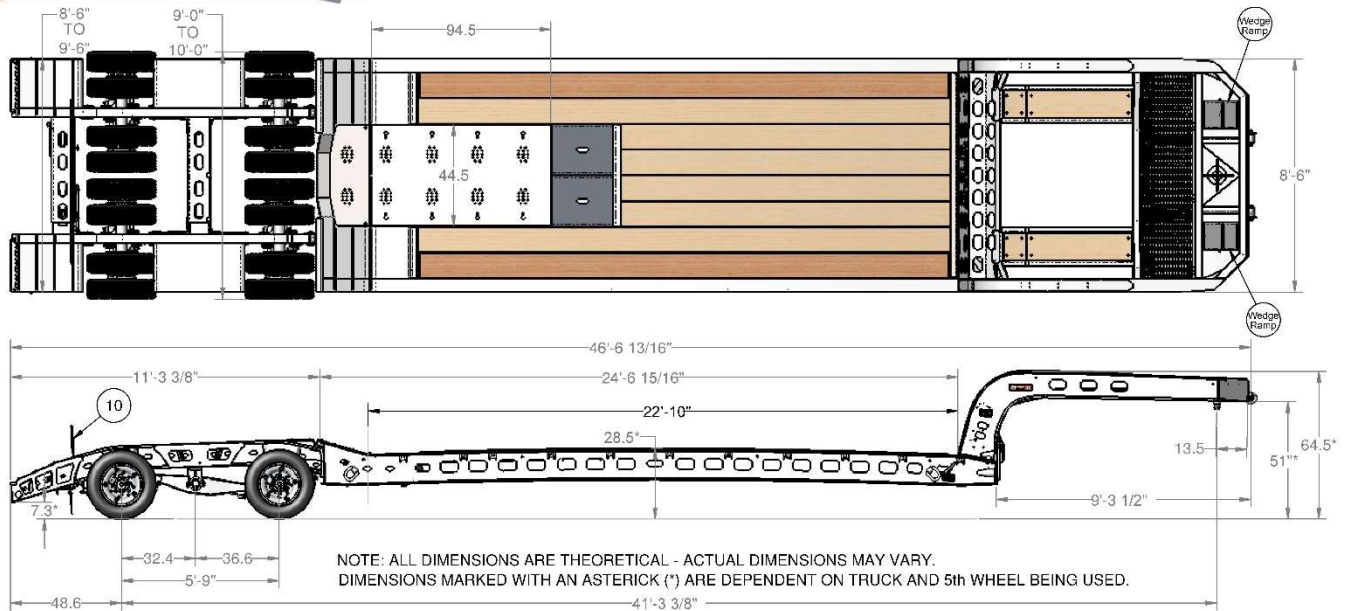

**AS CONFIGURED ABOVE | WEIGHT 14,640 LBS. | GVWR 106,000 LBS. | CAPACITY 91,000 LBS**

GOOSENECK	
LENGTH	STANDARD (8') OR 16" LONGER
KINGPIN SETTING	13.5" SETBACK
2 <sup>ND</sup> KP SETTING (OPTIONAL)	16" BEHIND 1 <sup>ST</sup> KINGPIN
5 <sup>TH</sup> WHEEL HEIGHT	48" TO 52"
SWING CLEARANCE	89.5" TO 103"
BEAMS – FLANGES & WEB	FLANGES 130 KSI & BEAMS 100 KSI
MAIN DECK	
DECK LENGTHS	UP TO 24 FEET
DECK BEAM FLANGES	IMPACT 130 STRUCTURAL/BAR 130 KSI
DECK BEAM WEBS	100 KSI
DECK CROSSMEMBERS	100 KSI
REAR CROSSMEMBERS X 2	130 KSI
OUTRIGGER BRACKETS	11 PER SIDE
D-RINGS	OPTIONAL PER SIDE
DECKING	3" APITONG OUTSIDE, 2" FIR INSIDE
UNLOADED DECK HEIGHT	28.5" – VARIES WITH 5 <sup>TH</sup> WHEEL
CONCENTRATED LOAD	90,000 LBS IN 11 FOOT SPAN
REAR END	
DECK OVER AXLE HEIGHT	34"
AIR POWERED EXPANDO	EXPANDS FROM 8'-6" TO 10' WIDE
ELECTRICAL	
CONNECTOR	7-WAY
LIGHTS	ALL LED
OPTIONS	12V FLASHERS AND/OR STROBES

AXLES & RUNNING GEAR	
NUMBER OF AXLES	4 TRUNNION AXLES
GAWR	18,160 LBS. X 4
AXLE SPACING	69"
SUSPENSION	MURRAY "3-POINT SUSPENSION"
DRUM BRAKES	ABS (4S2M), S-CAM, AUTO SLACK
WHEELS	ALUMINUM, 8-HOLE, HUB PILOTED
TIRES	215/75R 17.5
STANDARD TIRE BRANDS	HANKOOK OR CONTINENTAL
FINISHES	
UNDERCOAT	2 COATS IMRON ELITE EPOXY PRIMER
PAINT	3 COATS, IMRON ELITE BY DUPONT
SAFETY EQUIPMENT	4 MUD FLAPS & REFLECTIVE TAPE
OPTIONAL EQUIPMENT	
AIR OPERATED "ROBOLINK" & DECK LATCH (US PAT 8752854, 9272591)	
STEEL INSIDE ISLANDS BETWEEN TIRES	
DISC BRAKES WITH ABS	
20" LONGER TAIL (AS SHOWN IN THE ILLUSTRATION ABOVE)	
LOCKABLE TOOL BOXES IN WIDE GOOSENECK	
FRONT AND REAR LOADING RAMPS	
OUTRIGGERS, SLIDING OR REMOVABLE	
CHAIN BOXES WITH ALUMINUM COVERS	
EXCAVATOR DECK WELL OR PAN AT REAR OF DECK	
SPARE TIRE WITH LOCKABLE MOUNT ON GOOSENECK	
HEAVY DUTY REAR END, STRAPPING ON ISLANDS AND TOP FLANGE	