

Light
Weight



Expando

“PROFESSIONAL” Model 16-tire Heavy Equipment Trailer



- Strongest
- Lightest
- Most Versatile Custom Production Trailer on the market!
- Rugged, low-maintenance construction

Features:

- ✘ Permitted NET Load (CA. AZ. NV. UT. NM. TX. BC Canada) ---47 Tons*
- ✘ Guaranteed over-the-back loading
- ✘ Base Trailer Weight (approx) - 12,900 lbs. w/optional Aluminum Wheels
- ✘ Murray EXPANDABLE Running Gear (US Pat #3046980) 8'-6" to 10'
- ✘ Using 4 heavy - Duty Trunnion Axles and Murray's 3-point suspension
- ✘ Murray Mechanical Detachable Gooseneck (US Pat #3326527)

* With 21'-6" deck and 16" longer gooseneck for heavy front axle.



“It's the payload that counts!”

- ✘ 12-1/4" X 7-1/2" S-Cam Brakes
- ✘ Spare Tire and Wheel included
- ✘ 12 (twelve) 11" outriggers furnished
- ✘ LED lighting throughout

Rev. 11-07

MURRAY TRAILER • 1745 E. Mariposa Road • Stockton, California 95205-7790
PHONE: 209.466.0266 • FAX: 209.466.0550
www.murraytrailer.com



THE MURRAY "PROFESSIONAL™"

STANDARD SPECIFICATIONS

- Capacity (NET) 44 Tons - 47 Tons
- GAWR / GVWR 18,160 lbs. X 4 axles / 100,000 lbs.
- Trailer Weight (Est.) 12,900 lbs. with optional aluminum wheels
- Construction All 130 KSI Minimum yield beam flanges
- Axles 4 each 20,000 lbs.
- Suspension Murray 3 Point System
- Expando Power Two Murray 6" air cylinders
- Brakes 12¼" x 7½" S-cam brakes with ABS on the forward axles
- Wheels 6 hole steel - Stud piloted
- Tires 215/75 x 17.5R tires, 30.7" high
- Decking (Main deck) 3" x 12" Hardwood each side, 2" x 12" Douglas Fir all other
- Paint Customer-selected color, DuPont IMRON 5000
- Gooseneck Full width mechanical removable for over-the-front loading
- Unloaded Deck Ht. Flat deck: 27" nominal (varies with 5th wheel height)
Over-front Loading: 10" Over rear wheels: 33"
- Trailer and Deck Length .. 42' overall with 20' deck and standard gooseneck

OPTIONS & ACCESSORIES

- Disc brakes w/ABS all axles & 8 hole hub piloted aluminum wheels
- 16" longer gooseneck, second kingpin setting available
- Aluminum Wheels (Save 561 lbs)
- Locking tool boxes in gooseneck
- Front & rear loading ramps
- Half wheel covers
- Deck length up to 22'10"
- Chain box in deck with aluminum covers
- Excavator deck well
- Inside islands (Shown below)
- Hubometer
- "D" rings
- Other options available

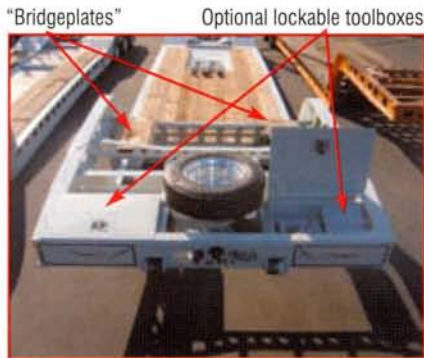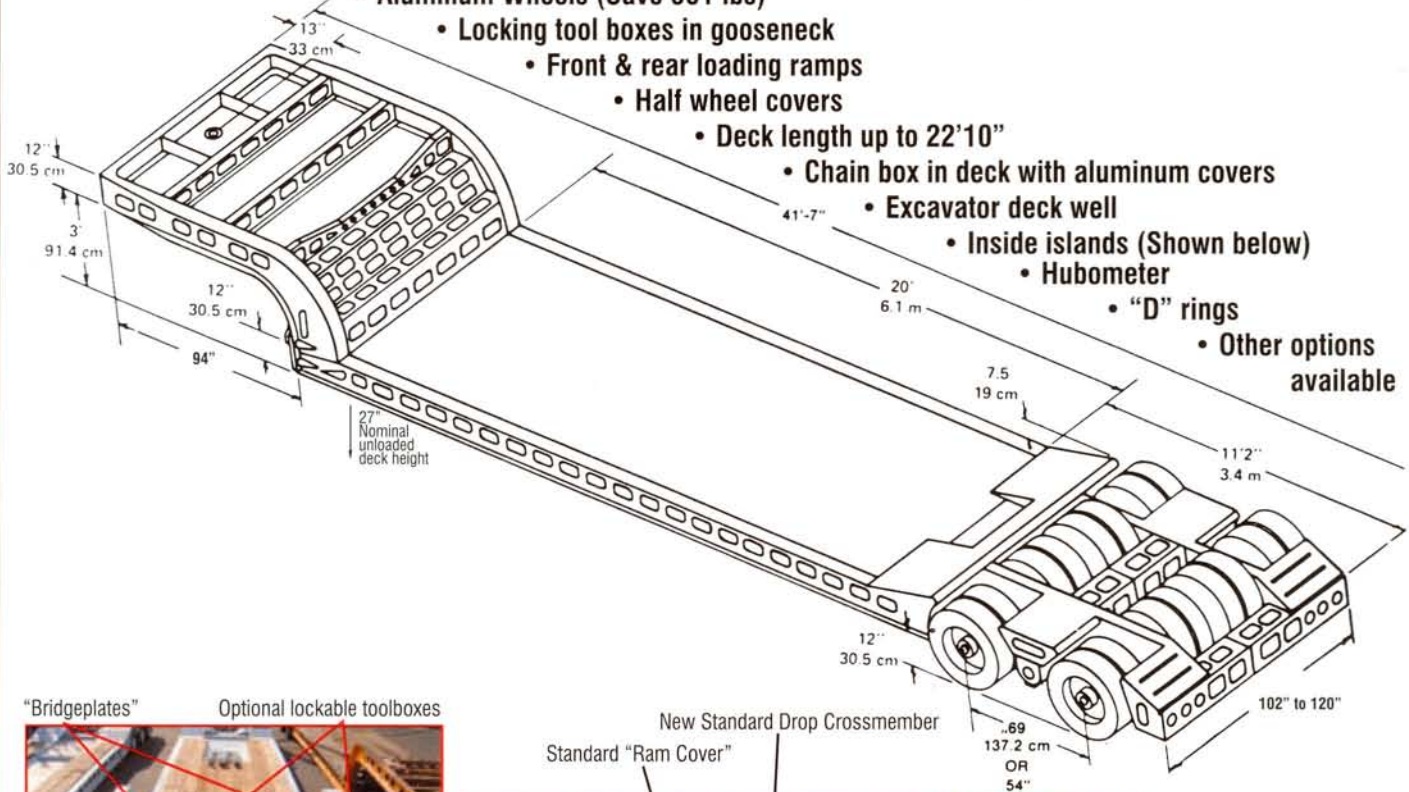

Rev. 11-07

"Built by Haulers for Haulers!"